


SPARTAN CARTONER

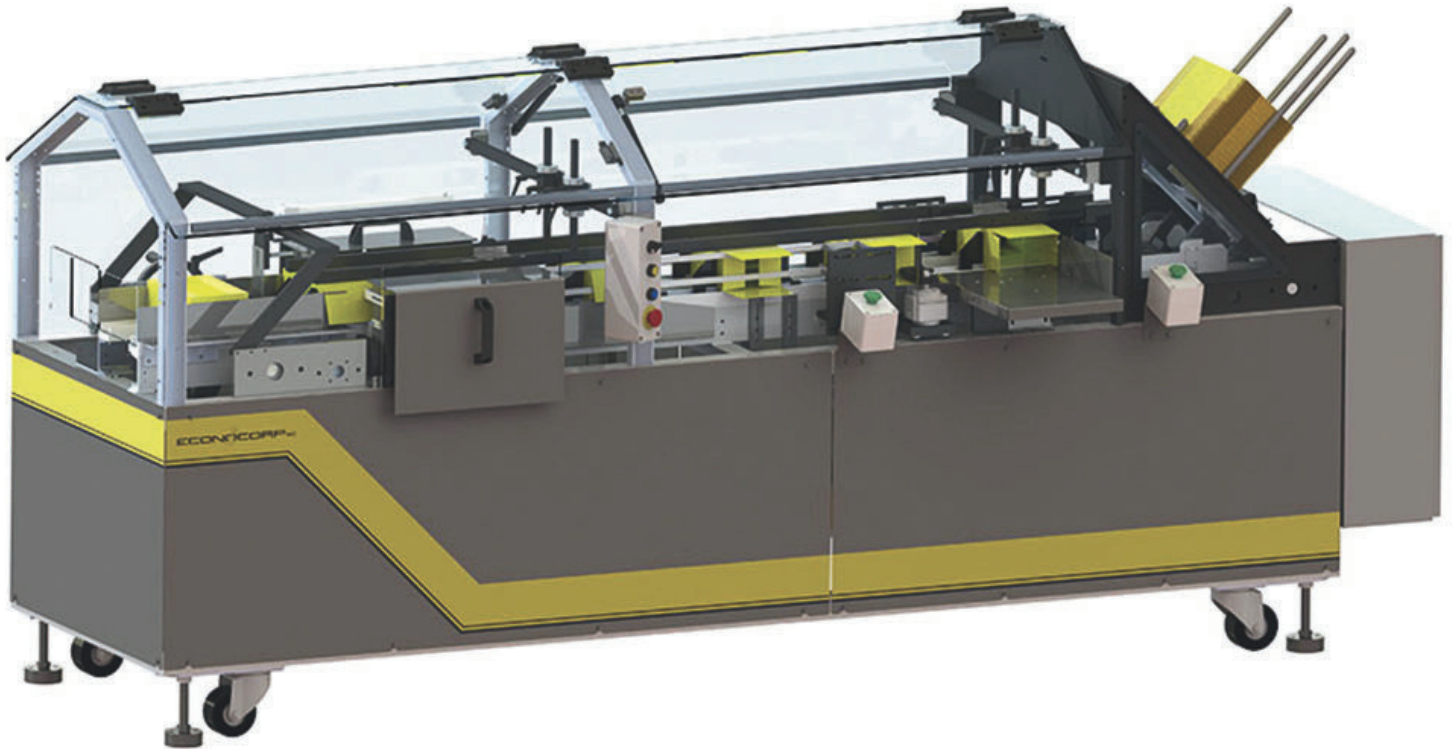


SPARTAN

METHOD OF OPERATION

1. End load carton is removed from a supply magazine via vacuum system
2. Carton is automatically erected at a product load station
3. Product is horizontally loaded into the erected carton
4. Loaded carton is transferred to the closing position for tuck or hot melt glue closure
5. Completed carton is then automatically discharged from the machine to a convenient working height

Additional Automation Options Available

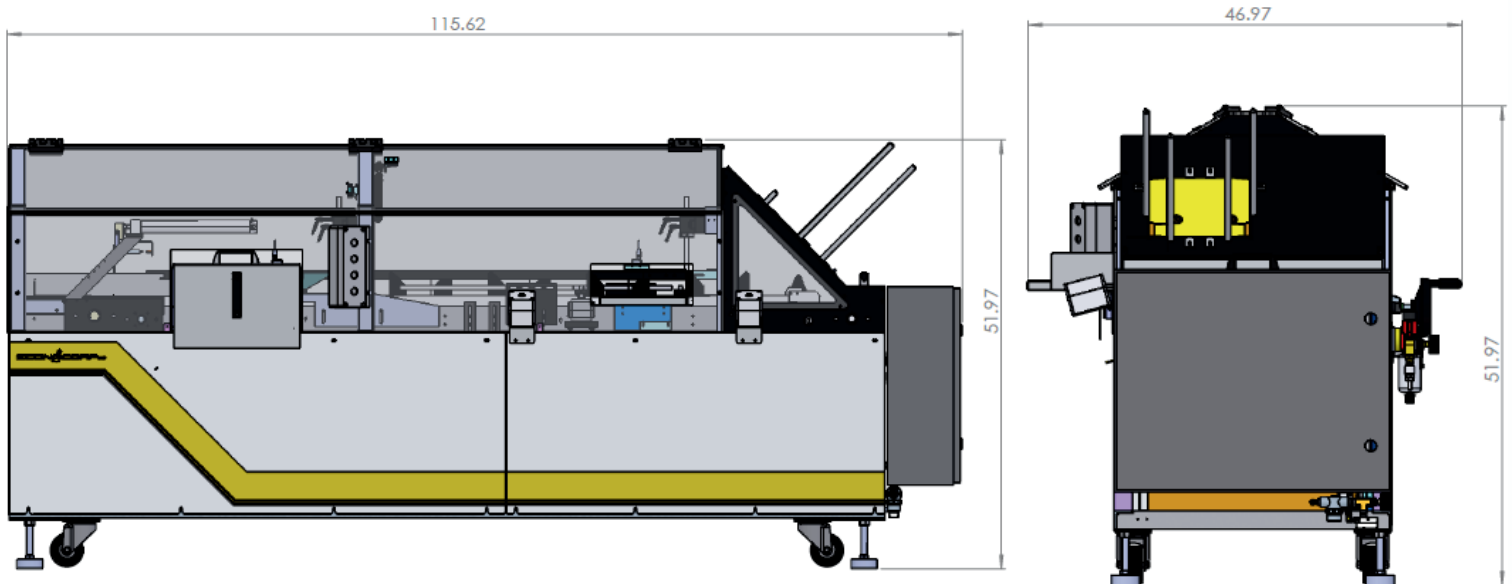

SPECIFICATIONS

Features

- Intermittent Motion
- Compact Footprint
- Sanitary Construction
- PLC Control
- Glue or Tuck
- Automatic Loading Optional

Packing Materials

- Paperboard
- Corrugate

Speed

- Up to 40 Cartons per Minute

Size Range

- Min: 2" x 1" x 5"
- Max: 10" x 4" x 12"

*Can be ordered outside of standard size range

Voltage & Controls

- 220 Volts, 50/60 Hz
- Single Phase

Air Consumption

- 20 SCFM
- 80 PSI

Shipping

- Approximately 1,800 lbs

*All Engineering Specifications and Designs are subject to change based on individual requirements